



Ecosteryl 125

Ecosteryl 125 is designed **for service providers** who want a sustainable solution for infectious medical waste treatment.



Capacities

125—175 kg/h
1—3.5 t/day



100%

Electric and
ecological




Microwave is the most eco-friendly solution for infectious medical waste treatment. Proven disinfection at min. $6\log_{10}$ (reduction of 99.9999%).



Powerful shredder with an anti-blocking system and waste reduced by 80% of its volume.



Dry, disinfected, unrecognizable and recyclable waste.

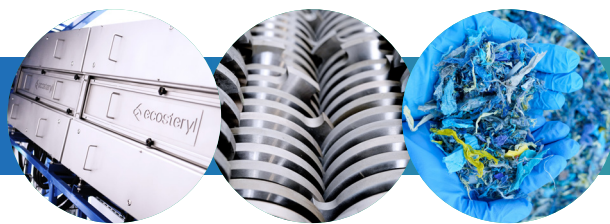

Capacities

The minimum processing capacity of Ecosteryl 125 is 125kg per hour. This is 1,667L/h à 2,333L/h with a density of 0.075kg/L.

Ecosteryl 125 is an ideal solution if you have to treat from 1 ton to 3.5 tons medical waste per day.



Technical data - Ecosteryl 125


Dimensions (L x W x H)	9.5m (+3.5 or 6m conveyor) x 4.6m x 5m
Recommended height	7m
Weight	13.5 tons
Type of process	Automatic and continuous process
Electrical powers	4 axes shredder, 37kW power Microwave generator, 12kW power and 2,450MHz frequency
Average power consumption	45kWh
Staff required	1 person can operate 2 machines
Installation, commissioning and training	On-site, by our team

Options

- Remote monitoring
- Automated container registration using barcode
- Link to the R-steryl sorting center

7m

Recommended height for loading part of the machine

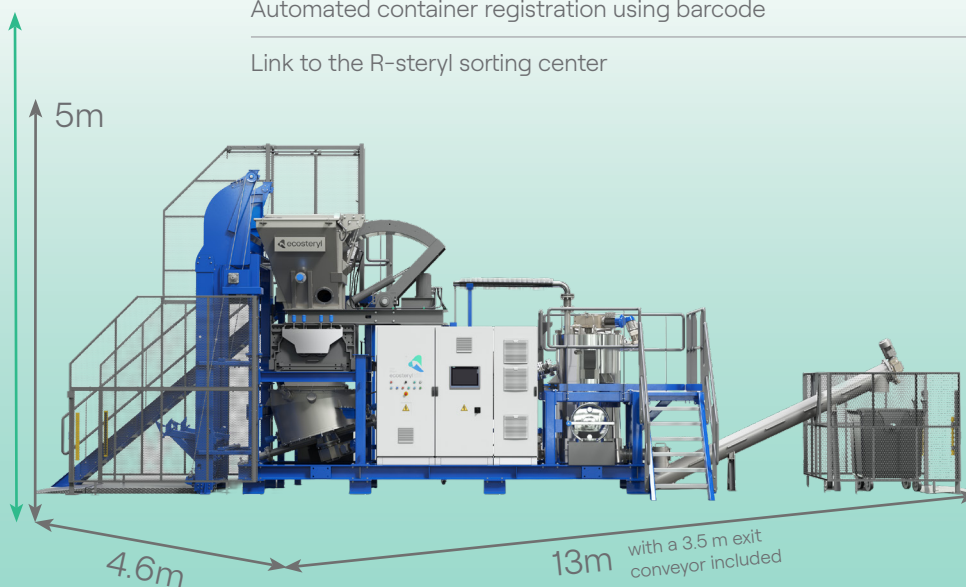

Contact: sales@ecosteryl.com - www.ecosteryl.com

3D process video:



Presentation video:



Testimonial:



Certifications



Ordered by:

